

OUT WITH THE OLD AND IN WITH THE NEW



FAVORITE SOLARIUM 6800 ALPHA PEARL

The 6800 alpha pearl intelligent features convince customers everywhere. Elegant design, perfect ergonomics, patented technology and individual settings ensure your favorite tan with only one click.





UV LAMPS



GLASS FACIAL
SYSTEM



X-TRA TAN



PRESELECTION



EASY
CONTROL



COLOR
MOTION



AIR
CONDITION




AQUA
COOL



AROMA



SOUND
SYSTEM



BLUETOOTH



MEGA
VOICE



CPI

TECHNICAL DATA – 6800 ALPHA PEARL

Power consumption: 14 kW

Weight: ~1367 lbs (with air conditioning)

Bench pane: 330 lbs (max. load capacity)

ELECTRICAL REQUIREMENTS

Power connection: rear side left

Protective class: IP20

Mains voltage: 3-phase: 3 x 220 V / ~ / 60 Hz

Wire cross section: 3-phase: 4 x AWG6

Circuit breaker recommended: 3-phase: 3 x 50 A
All tanning devices with Class-A ground
fault circuit interrupter GFCI.

CENTRAL EXHAUST AIR DISCHARGE

Fan: Exhaust-air socket Ø ~11.81 inch
Height to top ~82.48 inch

Minimum exhaust air flow rate: 594400 gal/hour



Exhaust-air hose: Ø ~11.81 inch

DIMENSIONS

Recommended roomsize: 9' x 10'

Dimensions in inch (HxWxD): ~60.39" x ~93.86" x ~56.34" (closed)

~76.46" x ~93.86" x ~56.34" (open)

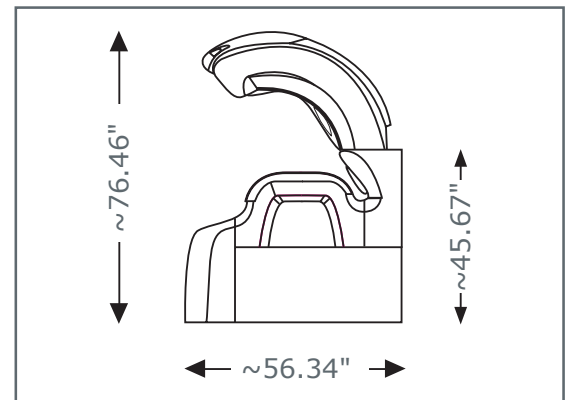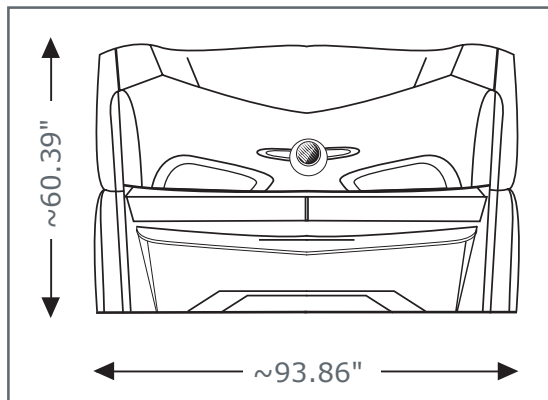

OUT WITH THE OLD AND IN WITH THE NEW



THE SOLARIUM 6700 ALPHA

The 6700 alpha provides the maximum of technology, comfort and first class at an unbeatable price-performance ratio. This is luxury at a price made for starters!



UV LAMPS



GLASS FACIAL
SYSTEM



X-TRA TAN



EASY
CONTROL




COLOR
MOTION




AIR
CONDITION



AQUA
COOL



SOUND
SYSTEM



BLUETOOTH



MEGA
VOICE



CPI

TECHNICAL DATA – 6700 ALPHA

Power consumption:	14 kW
Weight:	~1367 lbs (with air conditioning)
Bench pane:	330 lbs (max. load capacity)

ELECTRICAL REQUIREMENTS

Power connection:	rear side left
Protective class:	IP20
Mains voltage:	3-phase: 3 x 220 V / ~ / 60 Hz
Wire cross section:	3-phase: 4 x AWG6
Circuit breaker recommended:	3-phase: 3 x 50 A
All tanning devices with Class-A ground fault circuit interrupter GFCI.	

CENTRAL EXHAUST AIR DISCHARGE

Fan:	Exhaust-air socket Ø ~11.81 inch
	Height to top ~82.48 inch
Minimum exhaust air flow rate:	594400 gal/hour
Exhaust-air hose:	Ø ~11.81 inch

DIMENSIONS

Recommended roomsize:	9' x 10'
Dimensions in inch (HxWxD):	~60.39" x ~93.70" x ~56.30" (closed)
	~76.46" x ~93.70" x ~56.30" (open)

